



| | | | |
|-------------------|------------------------|----------|--------------------|
| Series | GEL | Warranty | See Warranty Terms |
| Volts | 2 | BCI | 2V OPzV |
| Cells | 1 | | |
| Terminal Type | F10 | | |
| Included Hardware | Threaded Insert & Bolt | | |

Charge

| | |
|----------------------------|---------------------------------------|
| Recommended Charge Current | 60 A |
| Maximum Charge Current | 180 A |
| Self-Discharge Rate | Less than 2% per month at 20°C (68°F) |
| Internal Resistance | 0.47 mΩ |

Capacity

| Capacity Affect by Temperature | 40°C (104°F) | 25°C (77°F) | 0°C (32°F) | -15°C (5°F) |
|--------------------------------|-----------------|----------------|---------------|----------------|
| | 105% | 100% | 89% | 79% |

| Hour Rate | Capacity / AMP Hour | Current / AMPs |
|-----------------|---------------------|----------------|
| @ 100 Hour Rate | 968 AH | 9.68 A |
| @ 20 Hour Rate | 785 AH | 39.25 A |
| @ 10 Hour Rate | 690 AH | 69 A |

Specifications




| | | |
|-------------------|---------|---------|
| Weight | 48 kg | 106 lbs |
| Length | 14.5 cm | 5.71" |
| Width | 20.6 cm | 8.11" |
| Height Inc. Term. | 67.3 cm | 26.5" |

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

| | |
|-----------|------|
| Container | ABS |
| Cover | ABS |
| Handles | None |

Cycle Life vs. Depth of Discharge

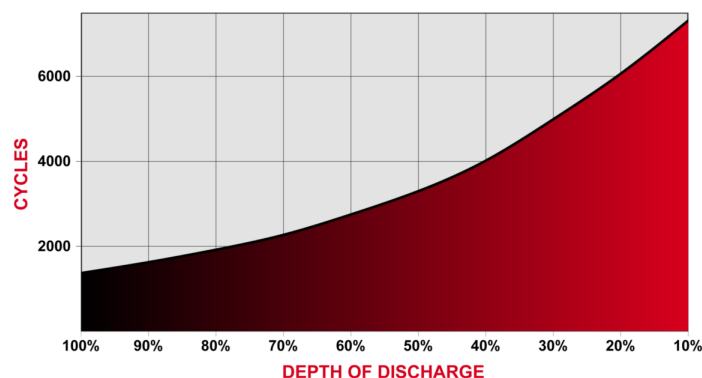

Capacity vs. Temperature

