



Series	GEL	Warranty	See Warranty Terms
Volts	2	BCI	2V OPzV
Cells	1		
Terminal Type		F10	
Included Hardware		Threaded Insert & Bolt	
Size & Thread		F10-M10	

Charge

Recommended Charge Current Capacity (String)	80 A
Maximum Charge Current (String)	240 A
Self-Discharge Rate	Less than 2% per month at 20°C (68°F)
Internal Resistance	0.34 mΩ

Capacity

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	89%	79%

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	1287 AH	12.87 A
@ 20 Hour Rate	1046 AH	52.3 A
@ 10 Hour Rate	920 AH	92 A

Specifications

Certified System




SAI GLOBAL
ISO 9001
Quality

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Weight	65.5 kg	144.5 lbs
Length	19.1 cm	7.52"
Width	21 cm	8.27"
Height Inc. Term.	67.3 cm	26.5"
Container	ABS	
Cover	ABS	
Handles	None	

Cycle Life vs. Depth of Discharge

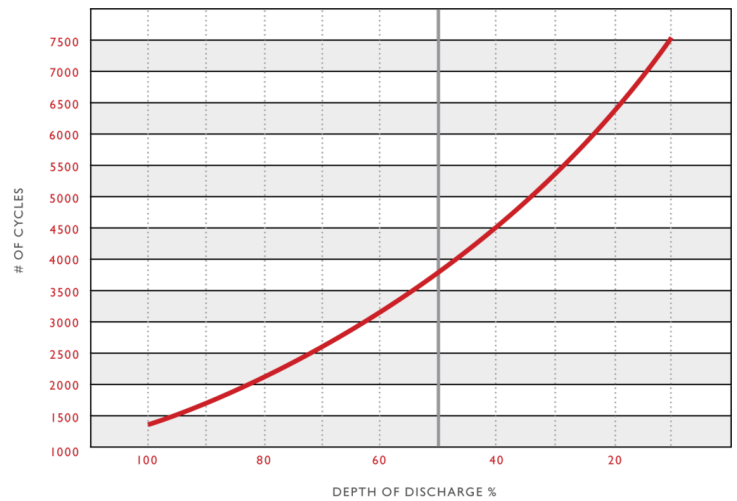

Capacity vs. Temperature

