



Series	4000	Warranty	3 Years
Volts	2	BCI	L16
Cells	1	Plates/Cell	53
Terminal Type	LT		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18		
Cables	Optional: 19" 4/0 interconnect cable		

### Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Recommended Charge Current Capacity (String)	175 A
Maximum Charge Current (String)	290 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

### Capacity

Cold Crank Amps (CCA) 0°F / -17°C	3378
Marine Crank Amps (MCA) 32°F / 0°C	4223
Reserve Capacity (RC @ 25A)	2909 Minutes
Reserve Capacity (RC @ 75A)	764 Minutes

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	<b>1728 AH</b>	<b>17.28 A</b>
@ 72 Hour Rate	<b>1683 AH</b>	<b>23.38 A</b>
@ 50 Hour Rate	<b>1623 AH</b>	<b>32.46 A</b>
@ 20 Hour Rate	<b>1503 AH</b>	<b>75.15 A</b>
@ 15 Hour Rate	<b>1413 AH</b>	<b>94.19 A</b>
@ 10 Hour Rate	<b>1353 AH</b>	<b>135.27 A</b>
@ 8 Hour Rate	<b>1293 AH</b>	<b>161.57 A</b>
@ 5 Hour Rate	<b>1202 AH</b>	<b>240.48 A</b>
@ 1 Hour Rate	<b>706 AH</b>	<b>706.41 A</b>

Amphere hour capacity ratings based on specific gravity of 1.280. Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

### Specifications




SAI GLOBAL  
ISO 9001  
Quality

Weight	59 kg	130 lbs
Length	31.8 cm	12.5"
Width	18.1 cm	7.13"
Height Inc. Term.	43.2 cm	17"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Electrolyte Reserve	57 mm	2.25"
Container	High Density Polypropylene	
Cover	High Density Polypropylene	
Handles	Rope / Plastic Handle	

### Cycle Life vs. Depth of Discharge

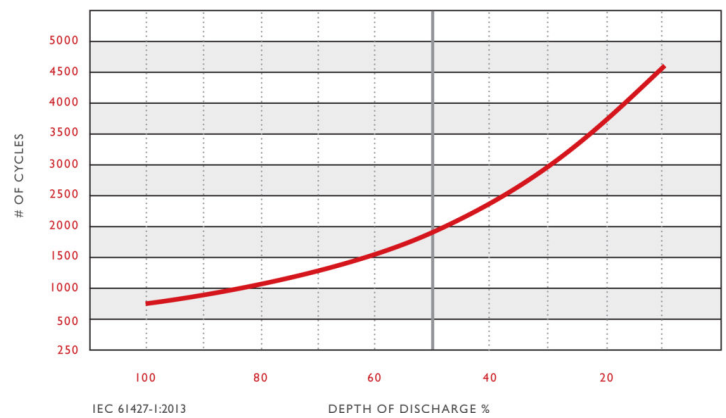

### Voltage vs. Depth of Discharge

