

# Rolls

FLOODED DEEP CYCLE BATTERIES

## 6 FS 250

6 VOLTS



CONTAINER:	Polypropylene
COVER:	Polypropylene
TERMINALS:	Universal molded post
HANDLES:	Lifting brack on cover

WEIGHT DRY:	27 kg	59 Lbs.
WEIGHT WET:	36 kg	79 Lbs.
LENGTH:	259 mm	10 3/16 Inches
WIDTH:	181 mm	7 1/8 Inches
HEIGHT:	290 mm	11 2/5 Inches

CELLS:	19 Plates/Cell	3 Cell
SEPARATOR THICKNESS:	2 mm	0.081 Inches
GLASS MAT INSULATION:	1 mm	0.02 Inches
ELECTROLYTE RESERVE: ABOVE PLATES	63 mm	1.75 Inches

PLATE HEIGHT:	180 mm	7.100 Inches
PLATE WIDTH:	159 mm	6.250 Inches
THICKNESS (POSITIVE):	2.79 mm	0.110 Inches
THICKNESS (NEGATIVE):	2.24 mm	0.088 Inches


COLD CRANK AMPS (CCA):	0°F / -17.8°C	758
MARINE CRANK AMPS (MCA):	32°F / 0°C	948
RESERVE CAPACITY (RC @ 25A):		336 Minutes

### CAPACITY **250 AH**

HOUR RATE:	SPECIFIC GRAVITY	CAPACITY / AMP HOUR	CURRENT / AMPS
@ 20 HOUR RATE	1.280	<b>250</b>	12.50
@ 15 HOUR RATE	1.280	242	16.13
@ 12 HOUR RATE	1.280	233	19.42
@ 10 HOUR RATE	1.280	225	22.50
@ 8 HOUR RATE	1.280	219	27.38
@ 6 HOUR RATE	1.280	212	35.33
@ 5 HOUR RATE	1.280	205	41.00
@ 4 HOUR RATE	1.280	182	45.50
@ 3 HOUR RATE	1.280	159	53.00
@ 2 HOUR RATE	1.280	135	67.50
@ 1 HOUR RATE	1.280	95	95.00



### CYCLE LIFE VS. DEPTH OF DISCHARGE

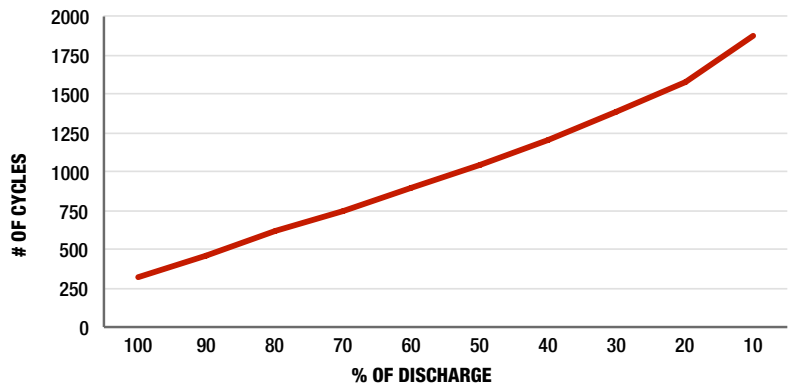

### VOLTAGE VS. DEPTH OF DISCHARGE

