

Rolls

FLOODED DEEP CYCLE BATTERIES

6 FS 260

6 VOLTS



CONTAINER:	Polypropylene
COVER:	Polypropylene
TERMINALS:	Universal molded post
HANDLES:	No handles

WEIGHT DRY:	30 kg	66 Lbs.
WEIGHT WET:	41 kg	90 Lbs.
LENGTH:	311 mm	12 1/4 Inches
WIDTH:	181 mm	7 1/8 Inches
HEIGHT:	286 mm	11 1/4 Inches



CELLS:	15 Plates/Cell	3 Cell
SEPARATOR THICKNESS:	2 mm	0.081 Inches
GLASS MAT INSULATION:	1 mm	0.02 Inches
ELECTROLYTE RESERVE: ABOVE PLATES	38 mm	1.5 Inches

PLATE HEIGHT:	197 mm	7.750 Inches
PLATE WIDTH:	143 mm	5.625 Inches
THICKNESS (POSITIVE):	4.45 mm	0.175 Inches
THICKNESS (NEGATIVE):	3.05 mm	0.120 Inches




COLD CRANK AMPS (CCA):	0°F / -17.8°C	610
MARINE CRANK AMPS (MCA):	32°F / 0°C	763
RESERVE CAPACITY (RC @ 25A):		503 Minutes
RESERVE CAPACITY (RC @ 75A):		132 Minutes

CAPACITY **260 AH**

HOURLY RATE:	SPECIFIC GRAVITY	CAPACITY / AMP HOUR	CURRENT / AMPS
@ 20 HOUR RATE	1.280	260	13.00
@ 15 HOUR RATE	1.280	252	16.80
@ 12 HOUR RATE	1.280	244	20.33
@ 10 HOUR RATE	1.280	239	23.90
@ 8 HOUR RATE	1.280	232	29.00
@ 6 HOUR RATE	1.280	221	36.83
@ 5 HOUR RATE	1.280	210	42.00
@ 4 HOUR RATE	1.280	180	45.00
@ 3 HOUR RATE	1.280	162	54.00
@ 2 HOUR RATE	1.280	139	69.50
@ 1 HOUR RATE	1.280	98	98.00

CYCLE LIFE VS. DEPTH OF DISCHARGE

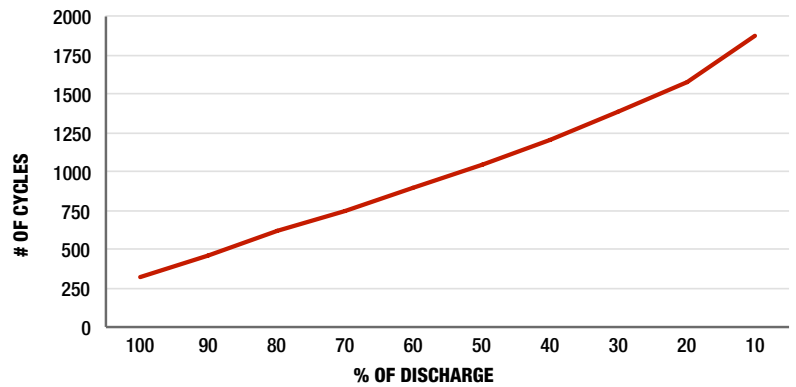

VOLTAGE VS. DEPTH OF DISCHARGE

