

Rolls

FLOODED DEEP CYCLE BATTERIES

8 HHG 21P

8 VOLTS



CONTAINER: (INNER)	Polypropylene
COVER: (INNER)	Polypropylene - heat sealed to inner container
CONTAINER: (OUTER)	High Density Polyethylene
COVER: (OUTER)	High Density Polyethylene snap fit to outer container
TERMINALS:	Flag with stainless steel nuts & bolts
HANDLES:	Molded

WEIGHT DRY:	41 kg	90 Lbs.
WEIGHT WET:	54 kg	118 Lbs.
LENGTH:	540 mm	21 1/4 Inches
WIDTH:	187 mm	7 3/8 Inches
HEIGHT:	283 mm	11 1/8 Inches

PLATE HEIGHT:	162 mm	6.375 Inches
PLATE WIDTH:	143 mm	5.625 Inches
THICKNESS (POSITIVE):	3.81 mm	0.150 Inches
THICKNESS (NEGATIVE):	2.49 mm	0.098 Inches




CELLS:	21 Plates/Cell	4 Cell
SEPARATOR THICKNESS:	2 mm	0.081 Inches
GLASS MAT INSULATION:	1 mm	0.02 Inches
ELECTROLYTE RESERVE: ABOVE PLATES	60 mm	2.375 Inches

COLD CRANK AMPS (CCA):	0°F / -17.8°C	963
MARINE CRANK AMPS (MCA):	32°F / 0°C	1204
RESERVE CAPACITY (RC @ 25A):		464 Minutes

CAPACITY **230 AH**

HOURLY RATE:	SPECIFIC GRAVITY	CAPACITY / AMP HOUR	CURRENT / AMPS
@ 100 HOUR RATE	1.280	306	3.06
@ 72 HOUR RATE	1.280	290	4.03
@ 50 HOUR RATE	1.280	274	5.47
@ 24 HOUR RATE	1.280	237	9.87
@ 20 HOUR RATE	1.280	230	11.50
@ 15 HOUR RATE	1.280	216	14.41
@ 12 HOUR RATE	1.280	205	17.06
@ 10 HOUR RATE	1.280	196	19.55
@ 8 HOUR RATE	1.280	184	23.00
@ 6 HOUR RATE	1.280	170	28.37
@ 5 HOUR RATE	1.280	161	32.20
@ 4 HOUR RATE	1.280	150	37.38
@ 3 HOUR RATE	1.280	136	45.23
@ 2 HOUR RATE	1.280	117	58.65
@ 1 HOUR RATE	1.280	83	82.80

CYCLE LIFE VS. DEPTH OF DISCHARGE

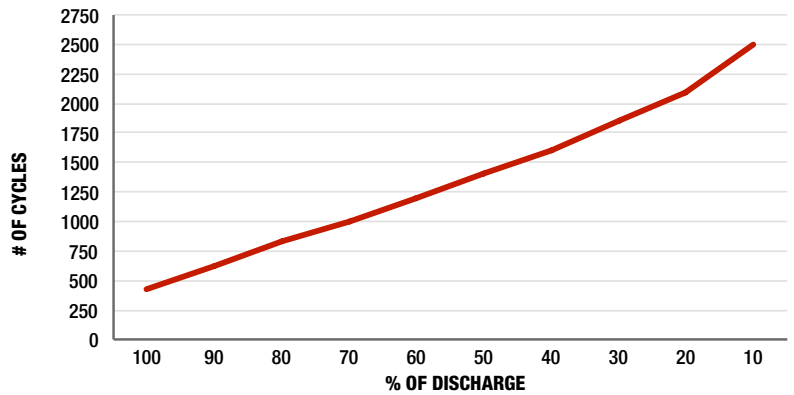

VOLTAGE VS. DEPTH OF DISCHARGE

