

Rolls

FLOODED DEEP CYCLE BATTERIES

8 HHG 25P

8 VOLTS



CONTAINER: (INNER)	Polypropylene
COVER: (INNER)	Polypropylene - heat sealed to inner container
CONTAINER: (OUTER)	High Density Polyethylene
COVER: (OUTER)	High Density Polyethylene snap fit to outer container
TERMINALS:	Flag with stainless steel nuts & bolts
HANDLES:	Molded

WEIGHT DRY:	44 kg	97 Lbs.
WEIGHT WET:	59 kg	130 Lbs.
LENGTH:	622 mm	24 1/2 Inches
WIDTH:	187 mm	7 3/8 Inches
HEIGHT:	292 mm	11 1/2 Inches

PLATE HEIGHT:	162 mm	6.375 Inches
PLATE WIDTH:	143 mm	5.625 Inches
THICKNESS (POSITIVE):	3.81 mm	0.150 Inches
THICKNESS (NEGATIVE):	2.49 mm	0.098 Inches




CELLS:	25 Plates/Cell	4 Cell
SEPARATOR THICKNESS:	2 mm	0.081 Inches
GLASS MAT INSULATION:	1 mm	0.02 Inches
ELECTROLYTE RESERVE: ABOVE PLATES	70 mm	2.75 Inches

COLD CRANK AMPS (CCA):	0°F / -17.8°C	1155
MARINE CRANK AMPS (MCA):	32°F / 0°C	1444
RESERVE CAPACITY (RC @ 25A):		557 Minutes

CAPACITY **275 AH**

HOURLY RATE:	SPECIFIC GRAVITY	CAPACITY / AMP HOUR	CURRENT / AMPS
@ 100 HOUR RATE	1.280	366	3.66
@ 72 HOUR RATE	1.280	347	4.81
@ 50 HOUR RATE	1.280	327	6.55
@ 24 HOUR RATE	1.280	283	11.80
@ 20 HOUR RATE	1.280	275	13.75
@ 15 HOUR RATE	1.280	259	17.23
@ 12 HOUR RATE	1.280	245	20.40
@ 10 HOUR RATE	1.280	234	23.38
@ 8 HOUR RATE	1.280	220	27.50
@ 6 HOUR RATE	1.280	204	33.92
@ 5 HOUR RATE	1.280	193	38.50
@ 4 HOUR RATE	1.280	179	44.69
@ 3 HOUR RATE	1.280	162	54.08
@ 2 HOUR RATE	1.280	140	70.13
@ 1 HOUR RATE	1.280	99	99.00

CYCLE LIFE VS. DEPTH OF DISCHARGE

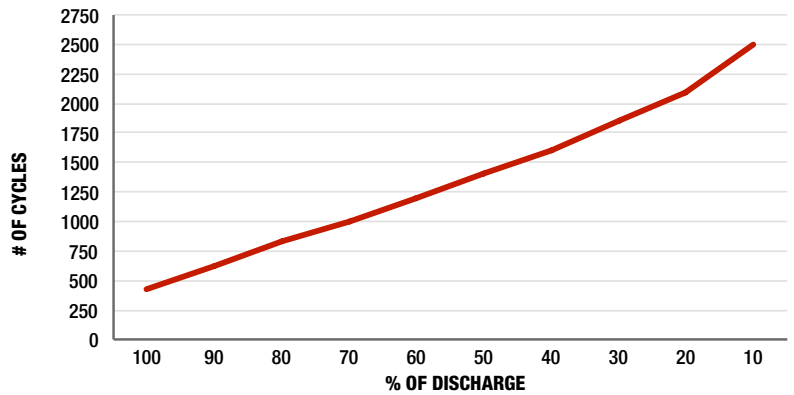

VOLTAGE VS. DEPTH OF DISCHARGE

