

Rolls

FLOODED DEEP CYCLE BATTERIES

EIGH 262



CONTAINER:	Polypropylene
COVER:	Polypropylene
TERMINALS:	Universal molded post
HANDLES:	No handles

WEIGHT DRY:	30 kg	66 Lbs.
WEIGHT WET:	41 kg	90 Lbs.
LENGTH:	311 mm	12 1/4 Inches
WIDTH:	181 mm	7 1/8 Inches
HEIGHT:	286 mm	11 1/4 Inches

6 VOLTS

CELLS:	15 Plates/Cell	3 Cell
SEPARATOR THICKNESS:	2 mm	0.081 Inches
GLASS MAT INSULATION:	1 mm	0.02 Inches
ELECTROLYTE RESERVE: ABOVE PLATES	38 mm	1.5 Inches

PLATE HEIGHT:	197 mm	7.750 Inches
PLATE WIDTH:	143 mm	5.625 Inches
THICKNESS (POSITIVE):	4.45 mm	0.175 Inches
THICKNESS (NEGATIVE):	3.05 mm	0.120 Inches




COLD CRANK AMPS (CCA):	0°F / -17.8°C	768
MARINE CRANK AMPS (MCA):	32°F / 0°C	960
RESERVE CAPACITY (RC @ 25A):		348 Minutes

CAPACITY **262 AH**

HOURLY RATE:	SPECIFIC GRAVITY	CAPACITY / AMP HOUR	CURRENT / AMPS
@ 100 HOUR RATE	1.280	348	3.48
@ 72 HOUR RATE	1.280	330	4.59
@ 50 HOUR RATE	1.280	312	6.24
@ 24 HOUR RATE	1.280	270	11.24
@ 20 HOUR RATE	1.280	262	13.10
@ 15 HOUR RATE	1.280	246	16.42
@ 12 HOUR RATE	1.280	233	19.43
@ 10 HOUR RATE	1.280	223	22.27
@ 8 HOUR RATE	1.280	210	26.20
@ 6 HOUR RATE	1.280	194	32.31
@ 5 HOUR RATE	1.280	183	36.68
@ 4 HOUR RATE	1.280	170	42.58
@ 3 HOUR RATE	1.280	155	51.53
@ 2 HOUR RATE	1.280	134	66.81
@ 1 HOUR RATE	1.280	94	94.32

CYCLE LIFE VS. DEPTH OF DISCHARGE

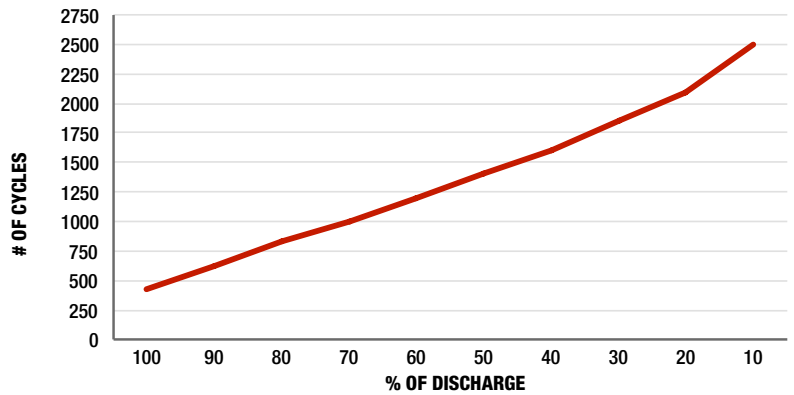

VOLTAGE VS. DEPTH OF DISCHARGE

