

## FLOODED DEEP CYCLE BATTERY

## 12 HHG 185P



Series	4000	Warranty	3 Years
Volts	12	BCI	4D MOD
Cells	6	Plates/Cell	17
Terminal Type	Flag		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18		

### Charge

Charge Voltage Range	14.7-15 V/cell @ 25°C (77°F)
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

### Capacity

Cold Crank Amps (CCA) 0°F / -18°C	713
Marine Crank Amps (MCA) 32°F / 0°C	891
Reserve Capacity (RC @ 25A)	444 Minutes
Reserve Capacity (RC @ 75A)	148 Minutes

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	<b>246 AH</b>	<b>2.46 A</b>
@ 72 Hour Rate	<b>233 AH</b>	<b>3.24 A</b>
@ 50 Hour Rate	<b>220 AH</b>	<b>4.4 A</b>
@ 20 Hour Rate	<b>185 AH</b>	<b>9.25 A</b>
@ 15 Hour Rate	<b>176 AH</b>	<b>11.72 A</b>
@ 10 Hour Rate	<b>163 AH</b>	<b>16.28 A</b>
@ 8 Hour Rate	<b>159 AH</b>	<b>19.89 A</b>
@ 5 Hour Rate	<b>146 AH</b>	<b>29.23 A</b>
@ 1 Hour Rate	<b>74 AH</b>	<b>74 A</b>

Ampere hour capacity ratings based on specific gravity of 1.280 at 27°C (80°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

### Specifications




SAI GLOBAL  
ISO 9001  
Quality

Weight	55 kg	121.5 lbs
Length	52.7 cm	20.75"
Width	22.2 cm	8.75"
Height Inc. Term.	25.4 cm	10"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Electrolyte Reserve	57 mm	2.25"
Container (Inner)	Polypropylene	
Cover (Inner)	Polypropylene - heat sealed to inner container	
Container (Outer)	High Density Polyethylene	
Cover (Outer)	High Density Polyethylene snap fit to outer container	
Handles	Molded	

### Cycle Life vs. Depth of Discharge

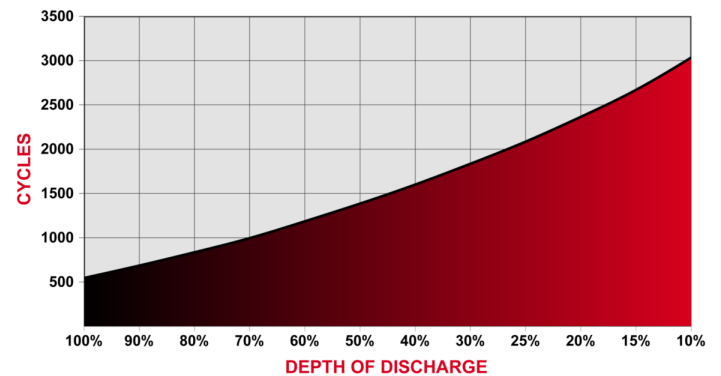

Rev.#3 | May 2018