



Series	5000	Warranty	5 Years
Volts	32	Design	SLI
Cells	16	Plates/Cell	25
Terminal Type	Paddle RR		

### Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

### Capacity

Cold Crank Amps (CCA) 0°F / -18°C	2066
Marine Crank Amps (MCA) 32°F / 0°C	2582
Reserve Capacity (RC @ 25A)	1647 Minutes
Reserve Capacity (RC @ 75A)	549 Minutes

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	<b>789 AH</b>	<b>7.89 A</b>
@ 72 Hour Rate	<b>768 AH</b>	<b>10.67 A</b>
@ 50 Hour Rate	<b>741 AH</b>	<b>14.82 A</b>
@ 20 Hour Rate	<b>686 AH</b>	<b>34.30 A</b>
@ 15 Hour Rate	<b>645 AH</b>	<b>42.99 A</b>
@ 10 Hour Rate	<b>617 AH</b>	<b>61.74 A</b>
@ 8 Hour Rate	<b>590 AH</b>	<b>73.75 A</b>
@ 5 Hour Rate	<b>549 AH</b>	<b>109.82 A</b>
@ 1 Hour Rate	<b>322 AH</b>	<b>322.42 A</b>

Ampere hour capacity ratings based on specific gravity of 1.280 at 27°C (80°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

### Specifications


Weight	561.5 kg	1238 lbs
Length	855 mm	33.67"
Width	686 mm	27"
Height Incl. Term.	521 mm	20.5"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.


Electrolyte Reserve	95 mm	3.75"
Container (Inner)	Polypropylene	
Cover (Inner)	Polypropylene - heat sealed to inner container	
Container (Outer)	High Density Polyethylene	
Cover (Outer)	High Density Polyethylene snap fit to outer container	
Handles	None	

- Compatible with Flow-rite single-point watering system for locomotive batteries
- Plastics are UL94 HB (UL94-V2 available)
- Plastics are impact copolymer rated to ASTM D256, D5420
- Vented design with integral flame arrestor vent caps

### Cycle Life vs. Depth of Discharge

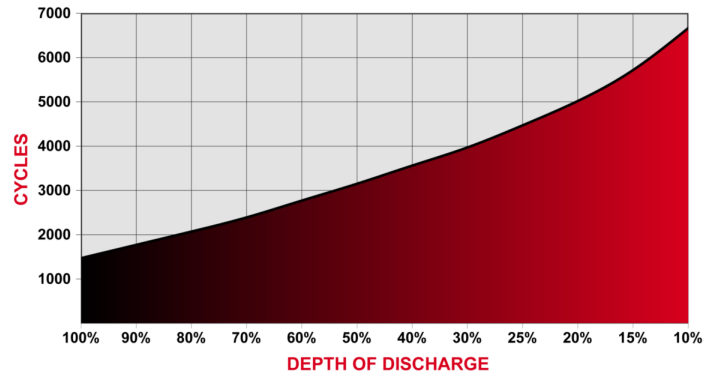

### Detailed Illustration

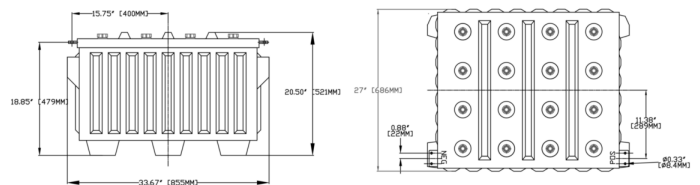

Designed in compliance with applicable BCI, DIN, BS & IEC standards.  
Tested in compliance to BCI & IEC standards.

intertek  
0122624