



Series	5000	Warranty	5 Years
Volts	4	Design	SPEC
Cells	2	Plates/Cell	27
Terminal Type	Flag		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18		
Cables	19" 4/0 interconnect cables *RE incl.		

### Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

### Capacity

Cold Crank Amps (CCA) 0°F / -18°C	3580			
Marine Crank Amps (MCA) 32°F / 0°C	4475			
Reserve Capacity (RC @ 25A)	3644 Minutes			
Reserve Capacity (RC @ 75A)	1215 Minutes			
Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	75%	50%

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	<b>1959 AH</b>	<b>19.59 A</b>
@ 72 Hour Rate	<b>1852 AH</b>	<b>25.73 A</b>
@ 50 Hour Rate	<b>1754 AH</b>	<b>35.08 A</b>
@ 20 Hour Rate	<b>1518 AH</b>	<b>75.92 A</b>
@ 15 Hour Rate	<b>1412 AH</b>	<b>94.14 A</b>
@ 10 Hour Rate	<b>1351 AH</b>	<b>135.14 A</b>
@ 8 Hour Rate	<b>1306 AH</b>	<b>163.23 A</b>
@ 5 Hour Rate	<b>1215 AH</b>	<b>242.94 A</b>
@ 1 Hour Rate	<b>683 AH</b>	<b>683.28 A</b>

Ampere hour capacity ratings based on specific gravity of 1.280 at 27°C (80°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

### Specifications


Weight	153.5 kg	338.5 lbs
Length	400 mm	15.75"
Width	270 mm	10.63"
Height Incl. Term.	629 mm	24.75"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Electrolyte Reserve	95 mm	3.75"
Container (Inner)	Polypropylene	
Cover (Inner)	Polypropylene - heat sealed to inner container	
Container (Outer)	High Density Polyethylene	
Cover (Outer)	High Density Polyethylene snap fit to outer container	
Handles	Molded	

- Plastics are UL94 HB (UL94-V2 available)
- Plastics are impact copolymer rated to ASTM D256, D5420
- Vented design with integral flame arrestor vent caps

### Cycle Life vs. Depth of Discharge

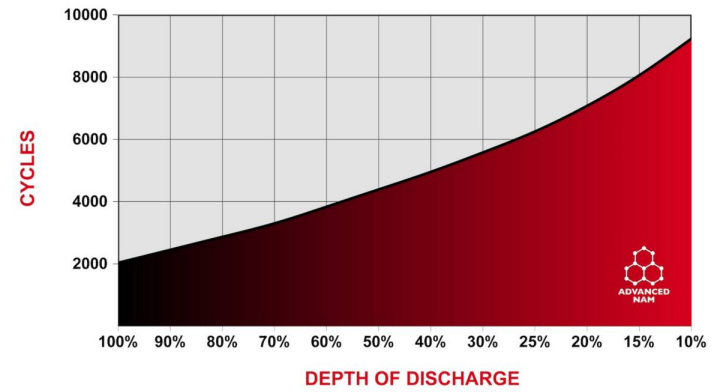

### Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.05 V	2.02 V	1.96 V	1.75 V
6 HR AH RATE	2.10 V	2.04 V	2.00 V	1.95 V	1.75 V
1 HR AH RATE	2.10 V	2.03 V	1.99 V	1.94 V	1.75 V

### Detailed Illustration

