

| | | | |
|-------------------|--|-------------|---------|
| Series | 5000 | Warranty | 5 Years |
| Volts | 8 | Design | SLI |
| Cells | 4 | Plates/Cell | 17 |
| Terminal Type | Flag RR | | |
| Included Hardware | S/S Hex Cap Screw, Nut, Lock & Flat Washer | | |
| Size & Thread | 5/16"-18 | | |

Charge

| | |
|----------------------|---------------------------------|
| Charge Voltage Range | 2.45-2.5 V/cell @ 25°C (77°F) |
| Float Voltage Range | 2.25 V/cell @ 25°C (77°F) |
| Self-Discharge Rate | 5%-10% per month at 25°C (77°F) |

Capacity

| | |
|------------------------------------|--------------|
| Cold Crank Amps (CCA) 0°F / -18°C | 1377 |
| Marine Crank Amps (MCA) 32°F / 0°C | 1721 |
| Reserve Capacity (RC @ 25A) | 1056 Minutes |
| Reserve Capacity (RC @ 75A) | 352 Minutes |

| Capacity Affect by Temperature | 40°C (104°F) | 25°C (77°F) | 0°C (32°F) | -15°C (5°F) |
|--------------------------------|--------------|-------------|------------|-------------|
| | | 105% | 100% | 75% |

| Hour Rate | Capacity / AMP Hour | Current / AMPS |
|-----------------|---------------------|----------------|
| @ 100 Hour Rate | 506 AH | 5.06 A |
| @ 72 Hour Rate | 493 AH | 6.84 A |
| @ 50 Hour Rate | 475 AH | 9.5 A |
| @ 20 Hour Rate | 440 AH | 22 A |
| @ 15 Hour Rate | 414 AH | 27.57 A |
| @ 10 Hour Rate | 396 AH | 39.6 A |
| @ 8 Hour Rate | 378 AH | 47.3 A |
| @ 5 Hour Rate | 352 AH | 70.4 A |
| @ 1 Hour Rate | 207 AH | 206.8 A |

Ampere hour capacity ratings based on specific gravity of 1.280 at 27°C (80°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

Specifications


| | | |
|--------------------|----------|---------|
| Weight | 102.5 kg | 226 lbs |
| Length | 648 mm | 25.5" |
| Width | 137 mm | 5.38" |
| Height Incl. Term. | 445 mm | 17.5" |

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

| | | |
|---------------------|---------------|-------|
| Electrolyte Reserve | 95 mm | 3.75" |
| Container (Inner) | Polypropylene | |
| Container (Outer) | Steel tray | |
| Handles | Built-in | |

- Plastics are UL94 HB (UL94-V2 available)
- Plastics are impact copolymer rated to ASTM D256, D5420
- Vented design with integral flame arrestor vent caps

Cycle Life vs. Depth of Discharge

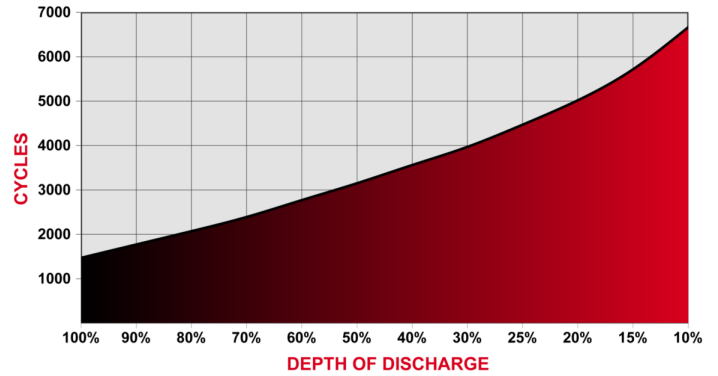

Voltage vs. Depth of Discharge

| DISCHARGE | 0% | 25% | 50% | 75% | 100% |
|---------------|--------|--------|--------|--------|--------|
| 20 HR AH RATE | 2.10 V | 2.05 V | 2.02 V | 1.96 V | 1.75 V |
| 6 HR AH RATE | 2.10 V | 2.04 V | 2.00 V | 1.95 V | 1.75 V |
| 1 HR AH RATE | 2.10 V | 2.03 V | 1.99 V | 1.94 V | 1.75 V |



Designed in compliance with applicable BCI, DIN, BS & IEC standards. Tested in compliance to BCI & IEC standards.

intertek
0122624