



Series	AGM-R	Warranty
Volts	12	Design
Terminal Type	F14(M8)	
Included Hardware	M8 stainless bolts & washers	
Size & Thread	M8	

### Charge

Recommended Charge Current	40 A
Maximum Charge Current	60 A
Internal Resistance	4 mΩ

### Capacity

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 20 Hour Rate	<b>212 AH</b>	<b>10.6 A</b>
@ 10 Hour Rate	<b>200 AH</b>	<b>20 A</b>
@ 5 Hour Rate	<b>170 AH</b>	<b>34 A</b>

Cut Off Voltage	Constant Current Discharge						
	1 hr	2 hr	3 hr	4 hr	5 hr	8 hr	10 hr
1.8 VPC	105.8	63.4	50	39.7	34	23.9	20


### Specifications

Weight	57.5 kg	127 lbs
Length	560 mm	22.1"
Width	125 mm	4.92"
Height Incl. Term.	316 mm	12.4"


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Container (Inner)	Polypropylene
Cover (Inner)	Polypropylene - heat sealed to inner container
Container (Outer)	High Density Polyethylene
Cover (Outer)	High Density Polyethylene snap fit to outer container

### Cycle Life vs. Depth of Discharge

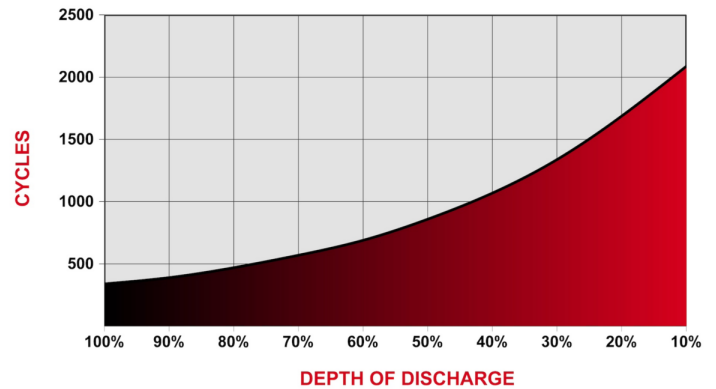

### Detailed Illustration

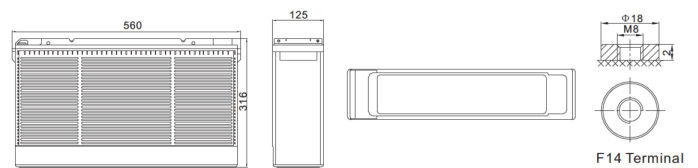

Designed in compliance with applicable BCI, DIN, BS & IEC standards. Tested in compliance to BCI & IEC standards.

