



Series		Warranty	See Warranty Terms
Volts	2	BCI	
Cells	1		
Terminal Type	F10(M8)		
Included Hardware	M8 stainless bolts & washers		
Size & Thread	M8		

Charge

Charge Voltage Range	2.45 V/cell @ 25°C (77°F)
Float Voltage Range	2.3 V/cell @ 25°C (77°F)
Recommended Charge Current	225 A
Maximum Charge Current	300 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)
Internal Resistance	.4 mΩ

Capacity

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 20 Hour Rate	1785 AH	89.25 A
@ 10 Hour Rate	1500 AH	150 A
@ 5 Hour Rate	1275 AH	255 A

Cut Off Voltage	Constant Current Discharge						
1.80 VPC	1 hr	2 hr	3 hr	4 hr	5 hr	8 hr	10 hr
	793.4	491.7	375	305.1	255	179.5	150

Specifications




Weight	80 kg	176.5 lbs
Length	35.5 cm	14"
Width	33.7 cm	13.3"
Height Inc. Term.	34.2 cm	13.5"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	None

Capacity vs. Temperature

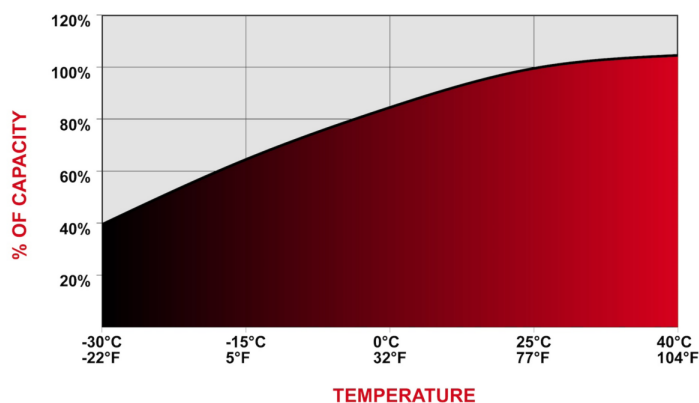

Detailed Illustration

