



Series	AGM-R	Warranty	See Warranty Terms
Volts	2	BCI	
Cells	1		
Terminal Type		F10(M8)	
Included Hardware		M8 stainless bolts & washers	
Size & Thread		M8	

Charge

Charge Voltage Range	2.45 V/cell @ 25°C (77°F)
Float Voltage Range	2.3 V/cell @ 25°C (77°F)
Recommended Charge Current	60 A
Maximum Charge Current	80 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)
Internal Resistance	.68 mΩ

Capacity

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 20 Hour Rate	476 AH	23.8 A
@ 10 Hour Rate	400 AH	40 A
@ 5 Hour Rate	340 AH	68 A

Cut Off Voltage	Constant Current Discharge						
	1 hr	2 hr	3 hr	4 hr	5 hr	8 hr	10 hr
1.80 VPC	211.6	131.1	100	81.3	68.0	47.9	40


Specifications

 SAI GLOBAL ISO 9001 Quality	Weight	19 kg	42 lbs
	Length	17 cm	6.69"
	Width	15 cm	5.91"
	Height Inc. Term.	34.2 cm	13.5"


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	None

Capacity vs. Temperature

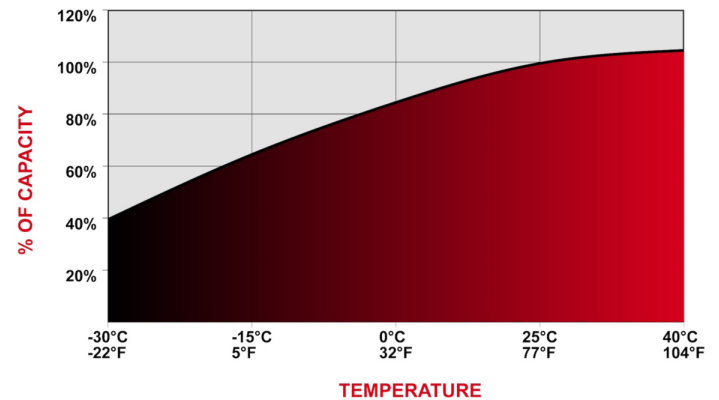

Detailed Illustration

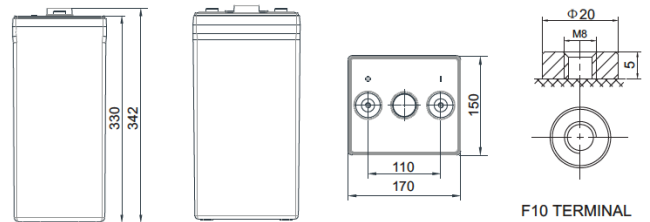

F10 TERMINAL



ISO 9001

ISO 14001

ISO 45001

MH 28539

BSTXD210316008515EC