



Series	4000	Warranty	3 Years
Volts	12	BCI	921
Cells	6	Plates/Cell	11
Terminal Type	DT		
Included Hardware	Stainless Steel K-Lock Nut		
Size & Thread	5/16"-18		
Cables	Optional: 19" 4/0 interconnect cable		

### Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Recommended Charge Current	25 A
Maximum Charge Current	40 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

### Capacity

Cold Crank Amps (CCA) 0°F / -18°C	810
Marine Crank Amps (MCA) 32°F / 0°C	1013
Reserve Capacity (RC @ 25A)	406 Minutes
Reserve Capacity (RC @ 75A)	107 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	75%	50%

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	<b>279 AH</b>	<b>2.79 A</b>
@ 72 Hour Rate	<b>265 AH</b>	<b>3.68 A</b>
@ 50 Hour Rate	<b>250 AH</b>	<b>5 A</b>
@ 20 Hour Rate	<b>210 AH</b>	<b>10.5 A</b>
@ 15 Hour Rate	<b>200 AH</b>	<b>13.3 A</b>
@ 10 Hour Rate	<b>185 AH</b>	<b>18.48 A</b>
@ 8 Hour Rate	<b>181 AH</b>	<b>22.58 A</b>
@ 5 Hour Rate	<b>166 AH</b>	<b>33.18 A</b>
@ 1 Hour Rate	<b>84 AH</b>	<b>84 A</b>


Ampere hour capacity ratings based on specific gravity of 1.280 at 27°C (80°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

### Specifications

	Weight	52 kg	114.5 lbs
	Length	39.1 cm	15.38"
	Width	17.8 cm	7"
	Height Inc. Term.	36.5 cm	14.38"
Electrolyte Reserve	51 mm	2"	
Container	Polypropylene		
Cover	Polypropylene		
Handles	Rope / Plastic Handle		

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

### Cycle Life vs. Depth of Discharge

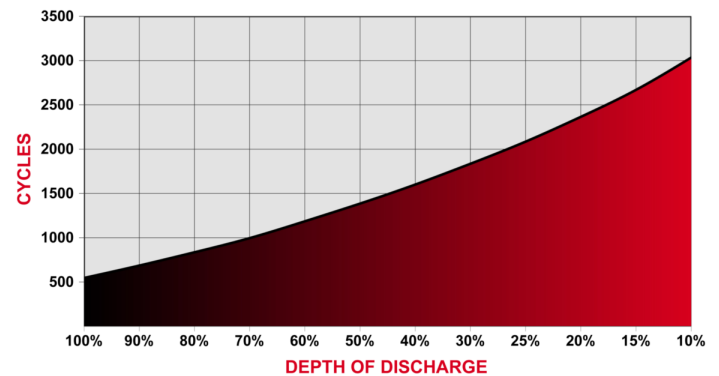

### Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.07 V	2.00 V	1.92 V	1.75 V
10 HR AH RATE	2.10 V	2.06 V	1.98 V	1.89 V	1.75 V
3 HR AH RATE	2.10 V	2.03 V	1.95 V	1.86 V	1.75 V
1 HR AH RATE	2.10 V	2.01 V	1.93 V	1.84 V	1.75 V

### Detailed Illustration

