

Series	4000	Warranty	3 Years
Volts	12	BCI	
Cells	6	Plates/Cell	11
Terminal Type	DT		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18		

Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)		
Float Voltage Range	2.25 V/cell @ 25°C (77°F)		
Recommended Charge Current	15 A		
Maximum Charge Current	25 A		
Self-Discharge Rate	5%-10% per month at 25°C (77°F)		

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	670			
Marine Crank Amps (MCA) 32°F / 0°C	906			
Reserve Capacity (RC @ 25A)	216 Minutes			
Reserve Capacity (RC @ 75A)	64 Minutes			
Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	75%	50%

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	173 AH	1.73 A
@ 20 Hour Rate	130 AH	6.5 A
@ 10 Hour Rate	111 AH	11.05 A
@ 5 Hour Rate	98 AH	19.5 A

Ampere hour capacity ratings based on specific gravity of 1.280 at 27°C (80°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.


Specifications

	Weight	29.5 kg	65 lbs
	Length	33.0 cm	13.1"
	Width	17.1 cm	6.75"
	Height Inc. Term.	24.1 cm	9.5"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Container	Polypropylene
Cover	Polypropylene
Handles	Integrated Top Mount

Cycle Life vs. Depth of Discharge

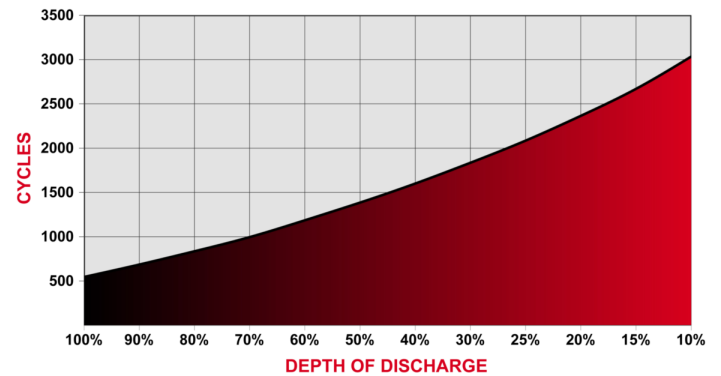

Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.07 V	2.00 V	1.92 V	1.75 V
10 HR AH RATE	2.10 V	2.06 V	1.98 V	1.89 V	1.75 V
3 HR AH RATE	2.10 V	2.03 V	1.95 V	1.86 V	1.75 V
1 HR AH RATE	2.10 V	2.01 V	1.93 V	1.84 V	1.75 V

Detailed Illustration

