



Series	GEL	Warranty	See Warranty Terms
Volts	2	Design	2V OPzV
Cells	1		
Terminal Type		F10	
Included Hardware	Threaded Insert & Bolt		

Charge

Recommended Charge Current	100 A
Maximum Charge Current	300 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	0.28 mΩ

Capacity

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	89%	79%

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	1610 AH	16.1 A
@ 20 Hour Rate	1308 AH	65.4 A
@ 10 Hour Rate	1150 AH	115 A


Specifications

Weight	80 kg	176 lbs
Length	233 mm	9.17"
Width	210 mm	8.27"
Height Incl. Term.	673 mm	26.5"


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	None

Cycle Life vs. Depth of Discharge

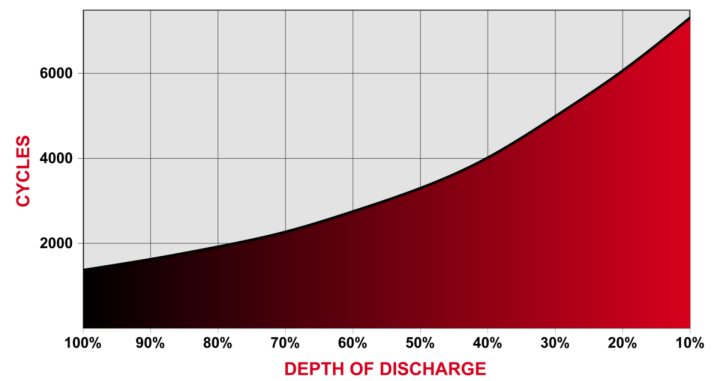

Capacity vs. Temperature

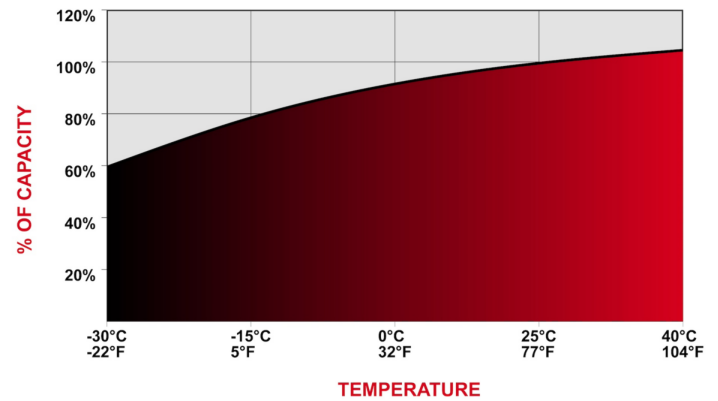

bc BATTERY COUNCIL INTERNATIONAL
 Designed in compliance with applicable BCI, DIN, BS & IEC standards.
 Tested in compliance to BCI & IEC standards.

