



Series	GEL	Warranty	See Warranty Terms
Volts	2	Design	2V OPzV
Cells	1		
Terminal Type		F10	
Included Hardware		Threaded Insert & Bolt	

### Charge

Recommended Charge Current	120 A
Maximum Charge Current	360 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	0.24 mΩ

### Capacity

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	89%	79%

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	<b>1938 AH</b>	<b>19.38 A</b>
@ 20 Hour Rate	<b>1571 AH</b>	<b>78.55 A</b>
@ 10 Hour Rate	<b>1380 AH</b>	<b>138 A</b>

### Specifications


Weight	95 kg	209.5 lbs
Length	275 mm	10.83"
Width	210 mm	8.27"
Height Incl. Term.	673 mm	26.5"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.


Container	ABS
Cover	ABS
Handles	None

- High strength ABS plastic (UL94 V0 available)
- Valve Regulated Design with integral flame arrestor
- Non-Hazardous, Non-Spillable

### Cycle Life vs. Depth of Discharge

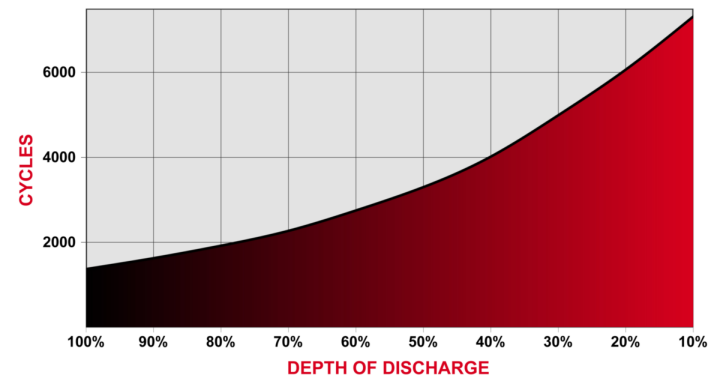

### Capacity vs. Temperature

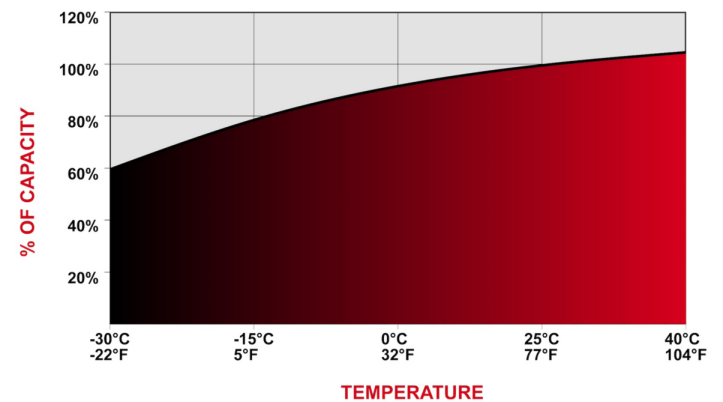

Designed in compliance with applicable BCI, DIN, BS & IEC standards. Tested in compliance to BCI & IEC standards.

