

Rolls



OPzV GEL DEEP CYCLE BATTERY

S2-3458GEL



Series	GEL	Warranty	See Warranty Terms
Volts	2	BCI	2V OPzV
Cells	1		
Terminal Type		M10	
Included Hardware		Stainless Steel Nuts & Bolts	
Size & Thread		F10-M10	

Charge

Recommended Charge Current	325 A
Maximum Charge Current	975 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	0.1 mΩ

Capacity

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	89%	79%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	4730 AH	47.3 A
@ 20 Hour Rate	3936 AH	196.8 A
@ 10 Hour Rate	3458 AH	345.8 A

Specifications




SAI GLOBAL
ISO 9001
Quality

Weight	241.5 kg	532.5 lbs
Length	57.6 cm	22.68"
Width	21.2 cm	8.35"
Height Inc. Term.	79.9 cm	31.46"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Container	ABS
Cover	ABS
Handles	None

Cycle Life vs. Depth of Discharge

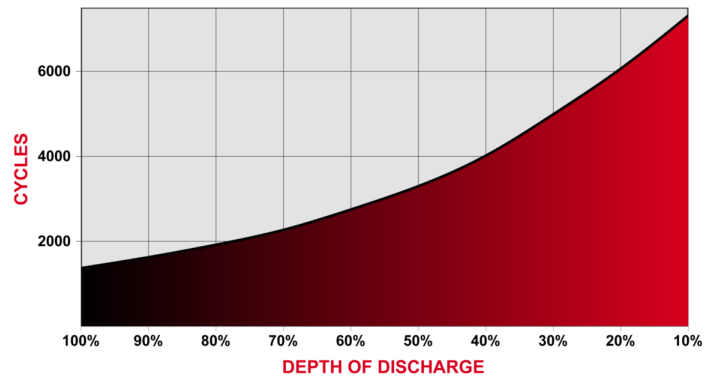

Capacity vs. Temperature

