



Series	GEL	Warranty	See Warranty Terms
Volts	2	Design	2V OPzV
Cells	1		
Terminal Type	F10		
Included Hardware	Threaded Insert & Bolt		

### Charge

Recommended Charge Current	35 A
Maximum Charge Current	105 A
Self-Discharge Rate	Less than 2% per month at 20°C (68°F)
Internal Resistance	0.6 mΩ

### Capacity

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	89%	79%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	<b>556 AH</b>	<b>5.56 A</b>
@ 20 Hour Rate	<b>459 AH</b>	<b>22.95 A</b>
@ 10 Hour Rate	<b>405 AH</b>	<b>40.5 A</b>


### Specifications

Weight	30 kg	66 lbs
Length	124 mm	4.88"
Width	206 mm	8.11"
Height Incl. Term.	498 mm	19.61"


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	None

### Cycle Life vs. Depth of Discharge

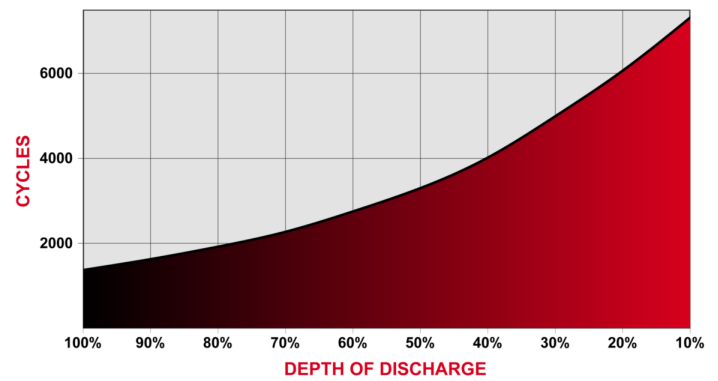

### Capacity vs. Temperature

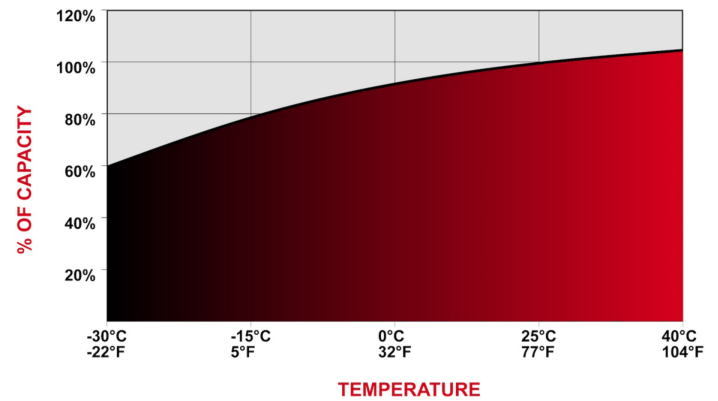

Designed in compliance with applicable BCI, DIN, BS & IEC standards. Tested in compliance to BCI & IEC standards.

