



Series	AGM-S	Warranty	See Warranty Terms
Volts	6	BCI	GC2H
Cells	3		
Terminal Type	F14(M8) and TP08 Adapter [+21mm]		
Included Hardware	M8 stainless bolts & washers & TP08 adapter		
Size & Thread	M8		

Charge

Charge Voltage Range	2.45 V/cell @ 25°C (77°F)
Float Voltage Range	2.3 V/cell @ 25°C (77°F)
Recommended Charge Current	50 A
Maximum Charge Current	75 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	1.3 mΩ

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	960			
Marine Crank Amps (MCA) 32°F / 0°C	1100			
Reserve Capacity (RC @ 25A)	531 Minutes			
Reserve Capacity (RC @ 75A)	135 Minutes			
Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	102%	100%	85%	65%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	275 AH	2.75 A
@ 20 Hour Rate	250 AH	12.5 A
@ 10 Hour Rate	229 AH	22.9 A
@ 5 Hour Rate	204 AH	40.8 A

Cut Off Voltage	Constant Current Discharge					
	1 hr	2 hr	3 hr	5 hr	8 hr	10 hr
VPC	136.1	78.5	56.6	39.7	27.2	22.5


Specifications

 SAI GLOBAL ISO 9001 Quality	Weight	34.5 kg	76 lbs
	Length	26.0 cm	10.24"
	Width	18.0 cm	7.09"
	Height Inc. Term.	26.8 cm	10.55"


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	Nylon Strap

Cycle Life vs. Depth of Discharge

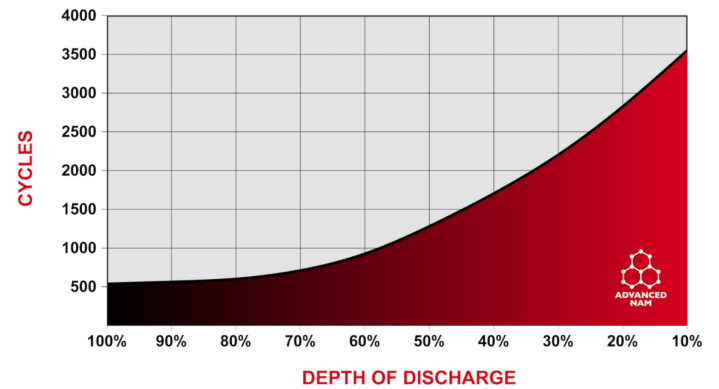

Capacity vs. Temperature

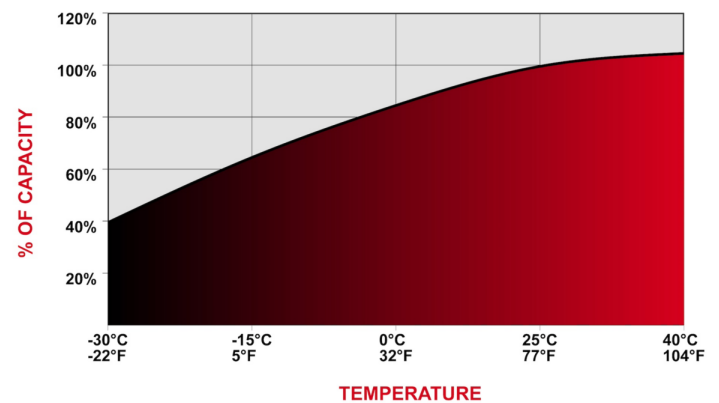

ISO 9001



ISO 14001



OHSAS 18001



MH 28539