



Series	AGM-S	Warranty	See Warranty Terms
Volts	6	Design	GC2H
Cells	3		
Terminal Type	F14(M8) and TP08 Adapter [+21mm]		
Included Hardware	M8 stainless bolts & washers & TP08 adapter		
Size & Thread	M8		

Charge

Charge Voltage Range	2.45 V/cell @ 25°C (77°F)
Float Voltage Range	2.3 V/cell @ 25°C (77°F)
Recommended Charge Current	50 A
Maximum Charge Current	75 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	1.3 mΩ

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	960			
Marine Crank Amps (MCA) 32°F / 0°C	1100			
Reserve Capacity (RC @ 25A)	531 Minutes			
Reserve Capacity (RC @ 75A)	135 Minutes			
Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	102%	100%	85%	65%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	275 AH	2.75 A
@ 20 Hour Rate	250 AH	12.5 A
@ 10 Hour Rate	229 AH	22.9 A
@ 5 Hour Rate	204 AH	40.8 A

Cut Off Voltage	Constant Current Discharge					
	1 hr	2 hr	3 hr	5 hr	8 hr	10 hr
VPC	136.1	78.5	56.6	39.7	27.2	22.5


Specifications

Weight	34.5 kg	76 lbs
Length	260 mm	10.24"
Width	180 mm	7.09"
Height Incl. Term.	268 mm	10.55"


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	Nylon Strap

Cycle Life vs. Depth of Discharge

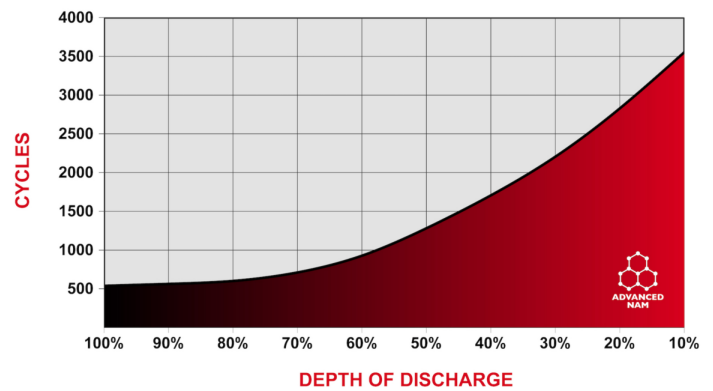

Capacity vs. Temperature

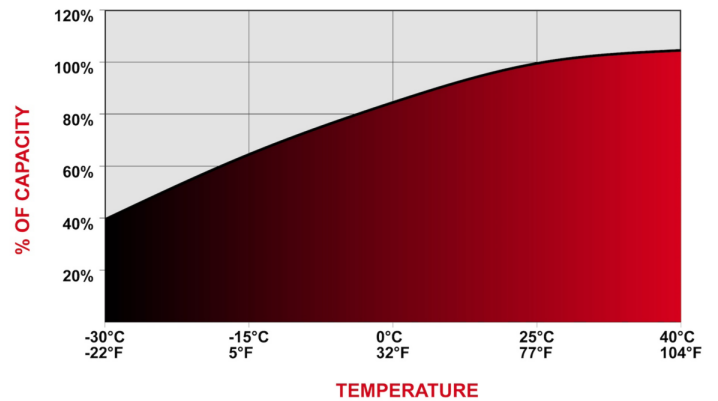

bc BATTERY COUNCIL INTERNATIONAL
 Designed in compliance with applicable BCI, DIN, BS & IEC standards.
 Tested in compliance to BCI & IEC standards.

