



Series	4000	Warranty	3 Years
Volts	6	Design	L16
Cells	3	Plates/Cell	15
Terminal Type	LT		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18		
Cables	Optional: 19" 4/0 interconnect cable		

### Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Recommended Charge Current	45 A
Maximum Charge Current	75 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

### Capacity

Cold Crank Amps (CCA) 0°F / -18°C	910
Marine Crank Amps (MCA) 32°F / 0°C	1137
Reserve Capacity (RC @ 25A)	755 Minutes
Reserve Capacity (RC @ 75A)	198 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	75%	50%

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	<b>449 AH</b>	<b>4.49 A</b>
@ 72 Hour Rate	<b>437 AH</b>	<b>6.07 A</b>
@ 50 Hour Rate	<b>421 AH</b>	<b>8.42 A</b>
@ 20 Hour Rate	<b>390 AH</b>	<b>19.50 A</b>
@ 15 Hour Rate	<b>367 AH</b>	<b>24.44 A</b>
@ 10 Hour Rate	<b>351 AH</b>	<b>35.10 A</b>
@ 8 Hour Rate	<b>335 AH</b>	<b>41.93 A</b>
@ 5 Hour Rate	<b>312 AH</b>	<b>62.40 A</b>
@ 1 Hour Rate	<b>183 AH</b>	<b>183.30 A</b>

Ampere hour capacity ratings based on specific gravity of 1.280 at 27°C (80°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

### Specifications


Weight	51 kg	112.5 lbs
Length	318 mm	12.5"
Width	181 mm	7.13"
Height Incl. Term.	425.5 mm	16.75"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Electrolyte Reserve	57 mm	2.25"
Container	High Density Polypropylene	
Cover	High Density Polypropylene	
Handles	Rope / Plastic Handle	

- Plastics are UL94 HB (UL94-V2 available)
- Plastics are impact copolymer rated to ASTM D256, D5420
- Vented design with integral flame arrestor vent caps

### Cycle Life vs. Depth of Discharge

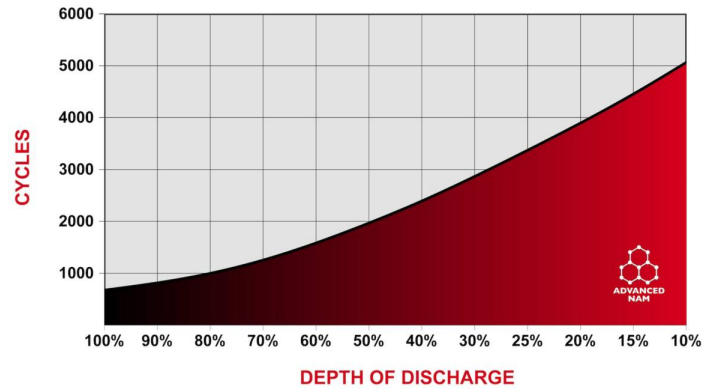

### Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.07 V	2.00 V	1.92 V	1.75 V
10 HR AH RATE	2.10 V	2.06 V	1.98 V	1.89 V	1.75 V
3 HR AH RATE	2.10 V	2.03 V	1.95 V	1.86 V	1.75 V
1 HR AH RATE	2.10 V	2.01 V	1.93 V	1.84 V	1.75 V

### Detailed Illustration

