
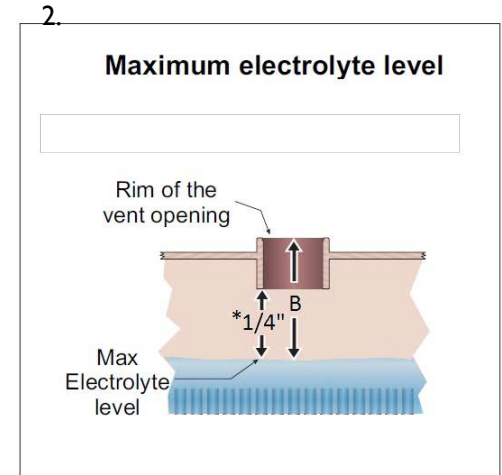


* Please note that maximum electrolyte level for all flooded models is .64cm | .25" below vent well as indicated in Diagram 2.

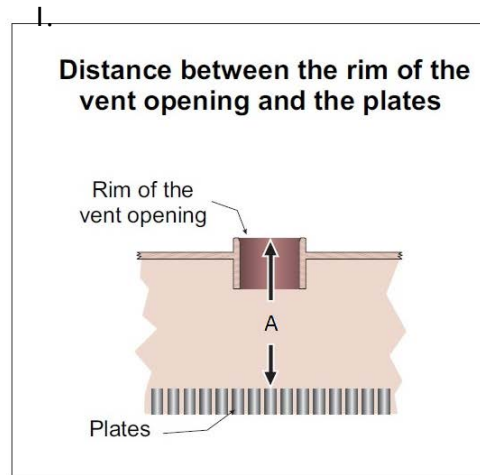

| SERIES | MODEL | TOP OF VENT TO PLATES (A) | TOP OF VENT TO MAX ELECTROLYTE LEVEL (B) | LIQUID RESERVE (A-B) |
|--------|-------------|---------------------------|--|----------------------|
| 4000 | S2 L16 | 10.16cm 4" | 4.45cm 1.75" | 5.72cm 2.25" |
| 4000 | S2 L16-HC | | | |
| 4000 | S2 L16-SC | | | |
| 4000 | S6 L16 | 8.26cm 3.25" | 3.18cm 1.25" | 5.08cm 2" |
| 4000 | S6 L16-HC | | | |
| 4000 | S6 L16-SC | | | |
| 4000 | S6 L16-CAL | | | |
| 4000 | S6 GC2 | 6.03cm 2.375" | 3.18cm 1.25" | 2.86cm 1.125" |
| 4000 | 6 FS GC | | | |
| 4000 | S6 GC2-HC | | | |
| 4000 | 6 FS GC-HC | | | |
| 4000 | 6 FS GC-SC | | | |
| 4000 | 6 FS GC-SC | | | |
| 4000 | S6 145 | 6.03cm 2.375" | 3.18cm 1.25" | 2.86cm 1.125" |
| 4000 | 6 FS 145 | | | |
| 4000 | 6 FS GC-DIN | 6.03cm 2.375" | 3.18cm 1.25" | 2.86cm 1.125" |
| 4000 | S6 250 | 6.35cm 2.5" | 3.18cm 1.25" | 3.18cm 1.25" |
| 4000 | 6 FS 250-SC | | | |
| 4000 | S6 305 | 7.62cm 3" | 3.18cm 1.25" | 4.45cm 1.75" |
| 4000 | 6 FS 305-HC | | | |
| 4000 | 6 FS 305-SC | | | |
| 4000 | 6 FS L16 | 8.26cm 3.25" | 3.18cm 1.25" | 5.08cm 2" |
| 4000 | 6 FS L16-HC | | | |
| 4000 | 6 HHG 15DP | 5.4cm 2.125" | 2.54cm 1" | 2.86cm 1.125" |
| 4000 | 6 HHG 31P | 9.53cm 3.75" | 6.35cm 2.5" | 3.18cm 1.25" |
| 4000 | 8 HHG 21P | | | |
| 4000 | 8 HHG 25P | | | |
| 4000 | 8 HHG 29P | | | |
| 4000 | 8 HHG 31P | | | |
| 4000 | 6 EHG 31P | | | |
| 4000 | 8 EHG 31P | 10.48cm 4.125" | 6.35cm 2.5" | 4.13cm 1.625" |
| 4000 | 8 FS GC | 6.35cm 2.5" | 3.18cm 1.25" | 3.18cm 1.25" |
| 4000 | 8 FS GC-HC | | | |
| 4000 | 8 M 23P | 11.43cm 4.5" | 6.35cm 2.5" | 5.08cm 2" |
| 4000 | S12 GC | 6.98cm 2.75" | 3.18cm 1.5" | 3.18cm 1.25" |
| 4000 | 12 FS GC-HC | | | |

| SERIES | MODEL | TOP OF VENT TO PLATES (A) | TOP OF VENT TO MAX ELECTROLYTE LEVEL (B) | LIQUID RESERVE (A-B) |
|--------|--------------|---------------------------|--|----------------------|
| 4000 | S12 185 | 8.26cm 3.25" | 3.18cm 1.25" | 5.08cm 2" |
| 4000 | 12 FS 185-HC | | | |
| 4000 | 12 HHG 185P | 4.76cm 1.875" | 4.13cm 1.625" | .64cm .25" |
| 4000 | 12 EHG 210P | 4.45cm 1.75" | 3.18cm 1.25" | 1.27cm .5" |
| 4000 | 12 HHG 325P | 6.03cm 2.375" | 3.18cm 1.25" | 2.86cm 1.125" |
| 4000 | 12 EHG 375P | 6.35cm 2.5" | 3.18cm 1.25" | 3.18cm 1.25" |
| 4000 | 12 MD 325P | 6.03cm 2.375" | 3.18cm 1.25" | 2.86cm 1.125" |
| 4000 | 12 MD 375P | 6.35cm 2.5" | 3.18cm 1.25" | 3.18cm 1.25" |
| 4500 | S2 L16-EX | 10.16cm 4" | 4.45cm 1.75" | 5.72cm 2.25" |
| 4500 | S6 L16-EX | 8.26cm 3.25" | 3.18cm 1.25" | 5.08cm 2" |
| 5000 | 2 OS 33P | 10.80cm 4.25" | 6.35cm 2.5" | 4.45cm 1.75" |
| 5000 | 2 YS 27P | 12.70cm 5" | 7.62cm 3" | 5.08cm 2" |
| 5000 | 2 YS 31P | | | |
| 5000 | 2 YS 62P | | | |
| 5000 | 2 KS 33P | 10.80cm 4.5" | 6.35cm 2.5" | 4.45cm 1.75" |
| 5000 | 4 KS 21P | | | |
| 5000 | 4 KS 25P | | | |
| 5000 | 4 KS 27P | | | |
| 5000 | 4 CS 17P | 11.43cm 4.5" | 6.35cm 2.5" | 5.08cm 2" |
| 5000 | 6 CS 17P | | | |
| 5000 | 6 CS 21P | | | |
| 5000 | 6 CS 25P | | | |
| 5000 | 6 CS 27P | | | |
| 5000 | 8 CS 17P | | | |
| 5000 | 8 CS 25P | 17.15cm 6.75" | 6.35cm 2.5" | 10.80cm 4.25" |
| 5000 | 8 CS 27P | | | |
| 5000 | 8 NS 23P | | | |
| 5000 | 8 NS 33P | | | |
| 5000 | 4 CH 23P | 12.07cm 4.75" | 6.35cm 2.5" | 5.72cm 2.25" |
| 5000 | 8 CH 23P | | | |
| 5000 | 8 CH 33P | | | |
| 5000 | 12 CS 11P | 11.43cm 4.5" | 6.35cm 2.5" | 5.08cm 2" |
| 5000 | 32 CH 25PR | 14.92cm 5.875" | 6.35cm 2.5" | 8.57cm 3.375" |
| 5000 | 32 CH 33PR | | | |
| 5000 | 32 CH 35PR | | | |