

Rolls

FLOODED DEEP CYCLE BATTERIES

12 FS 210



CONTAINER:	Polypropylene
COVER:	Polypropylene
TERMINALS:	Automotive (flag specified)
HANDLES:	Rope



WEIGHT DRY:	44 kg	97 Lbs.
WEIGHT WET:	60 kg	132 Lbs.
LENGTH:	391 mm	15 3/8 Inches
WIDTH:	178 mm	7 Inches
HEIGHT:	365 mm	14 3/8 Inches

12 VOLTS

CELLS:	9 Plates/Cell	6 Cell
SEPARATOR THICKNESS:	2 mm	0.081 Inches
GLASS MAT INSULATION:	1 mm	0.02 Inches
ELECTROLYTE RESERVE: ABOVE PLATES	51 mm	2 Inches


PLATE HEIGHT:	254 mm	10.000 Inches
PLATE WIDTH:	143 mm	5.625 Inches
THICKNESS (POSITIVE):	4.32 mm	0.170 Inches
THICKNESS (NEGATIVE):	3.05 mm	0.120 Inches
COLD CRANK AMPS (CCA):	0°F / -17.8°C	648
MARINE CRANK AMPS (MCA):	32°F / 0°C	810
RESERVE CAPACITY (RC @ 25A):		406 Minutes
RESERVE CAPACITY (RC @ 75A):		107 Minutes




CAPACITY 210 AH

HOURLY RATE:	SPECIFIC GRAVITY	CAPACITY / AMP HOUR	CURRENT / AMPS
@ 100 HOUR RATE	1.280	279	2.79
@ 72 HOUR RATE	1.280	265	3.68
@ 50 HOUR RATE	1.280	250	5.00
@ 24 HOUR RATE	1.280	216	9.01
@ 20 HOUR RATE	1.280	210	10.50
@ 15 HOUR RATE	1.280	200	13.30
@ 12 HOUR RATE	1.280	191	15.93
@ 10 HOUR RATE	1.280	185	18.48
@ 8 HOUR RATE	1.280	181	22.58
@ 6 HOUR RATE	1.280	170	28.35
@ 5 HOUR RATE	1.280	166	33.18
@ 4 HOUR RATE	1.280	147	36.75
@ 3 HOUR RATE	1.280	137	45.50
@ 2 HOUR RATE	1.280	126	63.00
@ 1 HOUR RATE	1.280	84	84.00

CYCLE LIFE VS. DEPTH OF DISCHARGE

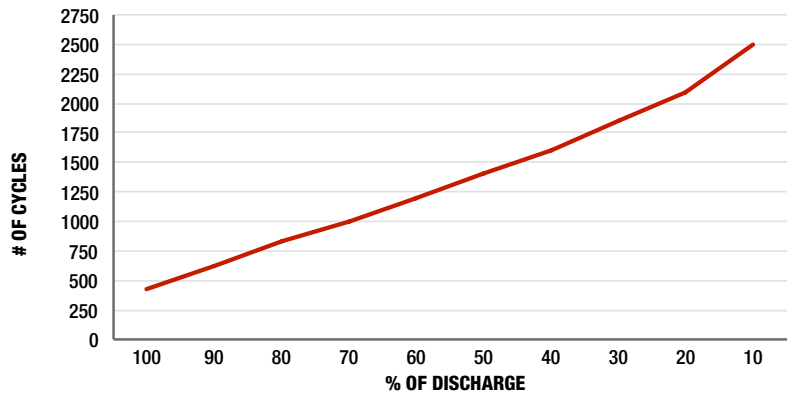

VOLTAGE VS. DEPTH OF DISCHARGE

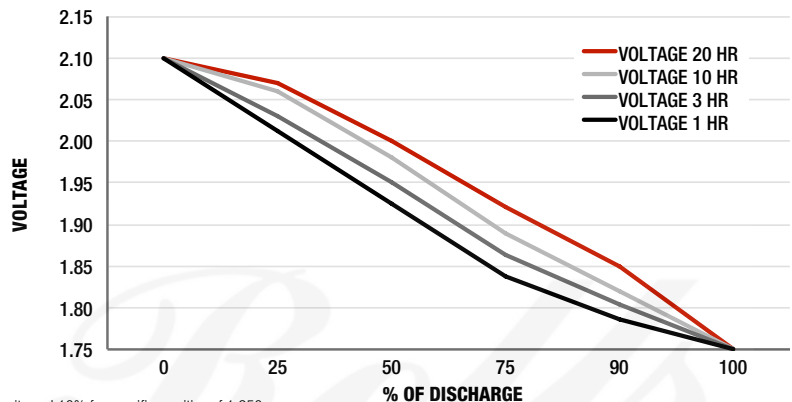

Amper Hour capacity ratings based on specific gravities of 1.280. Reduce capacities 5% for 1.265 specific gravity and 10% for specific gravities of 1.250