

# Rolls

FLOODED DEEP CYCLE BATTERIES

## 4 CH 23P

4 VOLTS



CONTAINER: (INNER)	Polypropylene
COVER: (INNER)	Polypropylene - heat sealed to inner container
CONTAINER: (OUTER)	High Density Polyethylene
COVER: (OUTER)	High Density Polyethylene snap fit to outer container
TERMINALS:	Flag with stainless steel nuts & bolts
HANDLES:	Rope

WEIGHT DRY:	46 kg	101 Lbs.
WEIGHT WET:	58 kg	128 Lbs.
LENGTH:	365 mm	14 3/8 Inches
WIDTH:	210 mm	8 1/4 Inches
HEIGHT:	464 mm	18 1/4 Inches

PLATE HEIGHT:	270 mm	10.625 Inches
PLATE WIDTH:	143 mm	5.625 Inches
THICKNESS (POSITIVE):	3.81 mm	0.150 Inches
THICKNESS (NEGATIVE):	3.05 mm	0.120 Inches
POSITIVE PLATE DOUBLE WRAPPED WITH SLYVER ENVELOPED WITH HEAVY DUTY SEPARATOR		




CELLS:	17 Plates/Cell	2 Cell
SEPARATOR THICKNESS:	3 mm	0.105 Inches
GLASS MAT INSULATION:	1 mm	0.020 Inches
ELECTROLYTE RESERVE: ABOVE PLATES	95 mm	3.75 Inches

COLD CRANK AMPS (CCA):	0°F / -17.8°C	1866
MARINE CRANK AMPS (MCA):	32°F / 0°C	2333
RESERVE CAPACITY (RC @ 25A):		1522 Minutes


### CAPACITY **605 AH**

HOURLY RATE:	SPECIFIC GRAVITY	CAPACITY / AMP HOUR	CURRENT / AMPS
@ 100 HOUR RATE	1.280	853	8.53
@ 72 HOUR RATE	1.280	805	11.18
@ 50 HOUR RATE	1.280	744	14.88
@ 24 HOUR RATE	1.280	629	26.22
<b>@ 20 HOUR RATE</b>	<b>1.280</b>	<b>605</b>	<b>30.25</b>
@ 15 HOUR RATE	1.280	563	37.51
@ 12 HOUR RATE	1.280	526	43.86
@ 10 HOUR RATE	1.280	502	50.22
@ 8 HOUR RATE	1.280	472	58.99
@ 6 HOUR RATE	1.280	430	71.59
@ 5 HOUR RATE	1.280	405	81.07
@ 4 HOUR RATE	1.280	375	93.78
@ 3 HOUR RATE	1.280	339	112.93
@ 2 HOUR RATE	1.280	290	145.20
@ 1 HOUR RATE	1.280	206	205.70

### CYCLE LIFE VS. DEPTH OF DISCHARGE

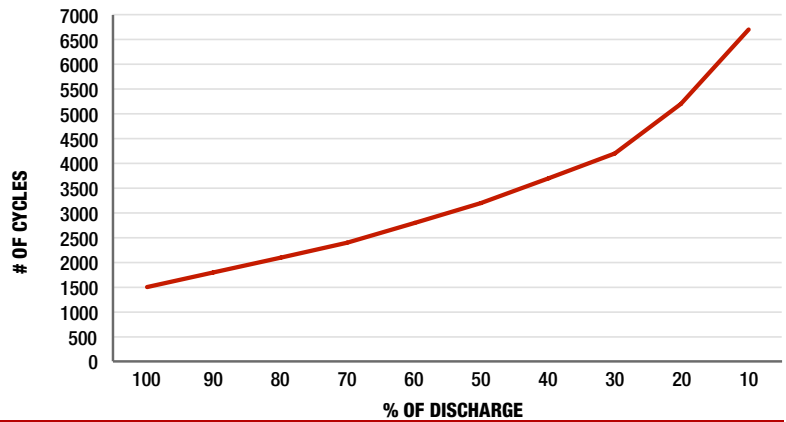

### VOLTAGE VS. DEPTH OF DISCHARGE

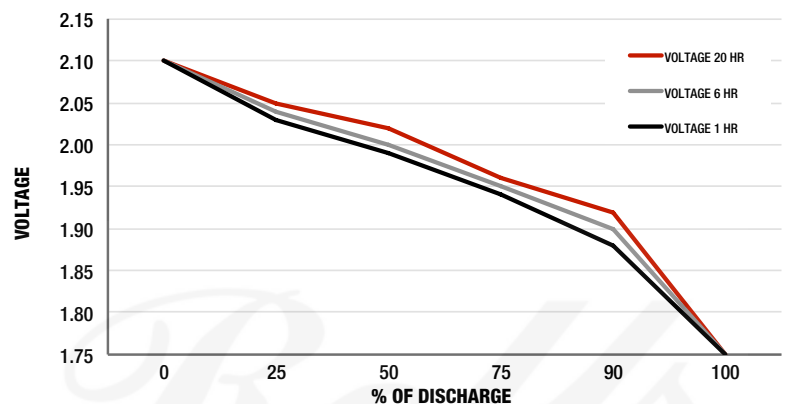

Amphère Hour capacity ratings based on specific gravities of 1.280. Reduce capacities 5% for 1.265 specific gravity and 10% for specific gravities of 1.250

WWW.ROLLSBATTERY.COM

SURRETTE BATTERY COMPANY 1 STATION RD SPRINGHILL, NS CANADA B0M 1X0

SPEC 01

14-01-01 REV. 1