



Series	R-Series LFP	Warranty	See Warranty Terms
Volts	12	BCI	G31
Terminal Type		M8	
Included Hardware		M8 stainless bolts & washers	

### Charge

Charge Voltage Range	14.0 - 14.6V	
Recommended End of Discharge Voltage	12.0 V	
End of Discharge Protection Voltage	10.0 V	
Recommended Charge Voltage	14.4 V	
Recommended Charge Current		
0~10°C (32~50°F)	0.2C	40A
10~35°C (50~95°F)	0.5C	100A
35~50°C (95~122°F)	0.2C	40A

### Charge Mode:

- Charge at recommend voltage & current by temperature until charge current drops to  $\leq 0.05C$  (CC,CV)
- DO NOT USE TEMPERATURE COMPENSATION
- No BTS (Battery Temperature Sensor)

Max Continuous Charge Current	75 A
Max Continuous Discharge Current	150 A
Surge Current Limit	800 A (300ms)
Charge Temperature Range	0°C~55°C (32~131°F)
Discharge Temperature Range	-20°~60°C (-4~140°F)
Storage Temperature Range	-5°~45°C (23~113°F)

### Capacity

Nominal Capacity	150 AH
Total Energy	1.92 kWh
Nominal Voltage	12.8 V

### Safety

- Cylindrical LiFePO4 cells (UL1642)
- IEC62133 (cell), IEC62619(cell), UN38.3 (cell/pack)
- ROHS (cell), CE system certification, IP65 Rating

### Design

- Standard-size (BCI) ABS container for easy VRLA replacement
- Fast charge/discharge performance
- Maintenance-free operation
- Bluetooth Connectivity & dedicated IOS & Android App

### Battery Management System (BMS)

- Integrated hardware BMS inside
- Independent charge & discharge protection
- Short-Circuit Protection, Over-Voltage Protection, Low-Voltage Protection, Over-Current Protection, Low-Temperature Protection, Over-Temperature Protection


### 12V LFP PROFILE

Specifications			
	Weight	15.5 kg	34.2 lbs
	Length	33.0 cm	13"
	Width	17.3 cm	6.81"
	Height Inc. Term.	21.9 cm	8.62"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	Rope / Plastic Handle
Internal BMS Model	4S150A
Expected Cycle Life	>6000 @ 80% DOD, >3000 @ 100% DOD
Series Connection	4 UNITS MAX (48V)
Parallel Connection	4 UNITS MAX (48V) or 6 UNITS MAX (12V)
Connectivity	Up to 4S4P (in 48V configuration) or 1S6P (in 12V configuration)

### Detailed Illustration

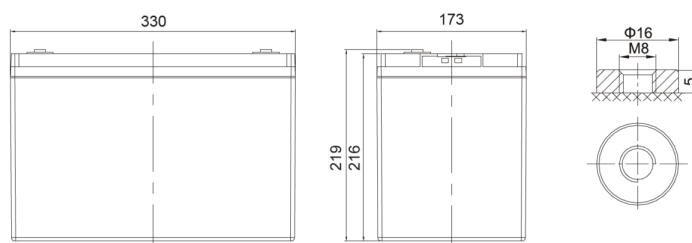

ISO9001



ISO14001



OHSAS18001

